


Installation neuve et Rénovation



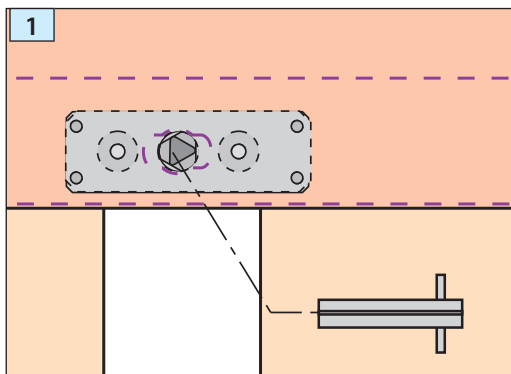


The module **CEX/ORLY** has a **waterproof reversible contact** 4A/220 V. The contact is activated by the safety triangular key as soon as it has been turned to open the door. The contact is established and gives the possibility to engage for example a buzzer alarm and the lighting of the shaft. After removing the key, the contact takes his initial position again.

This module is intended to automatic sliding doors or trappe d'accès.
The module **CEX/ORLY** is came batteuse

WIRING :

- **3 wires** (inverse contact) :
black (commun), **grey** (no) **blue** (Nf)

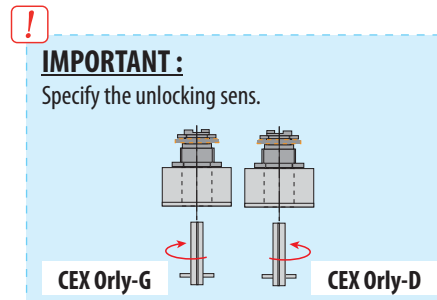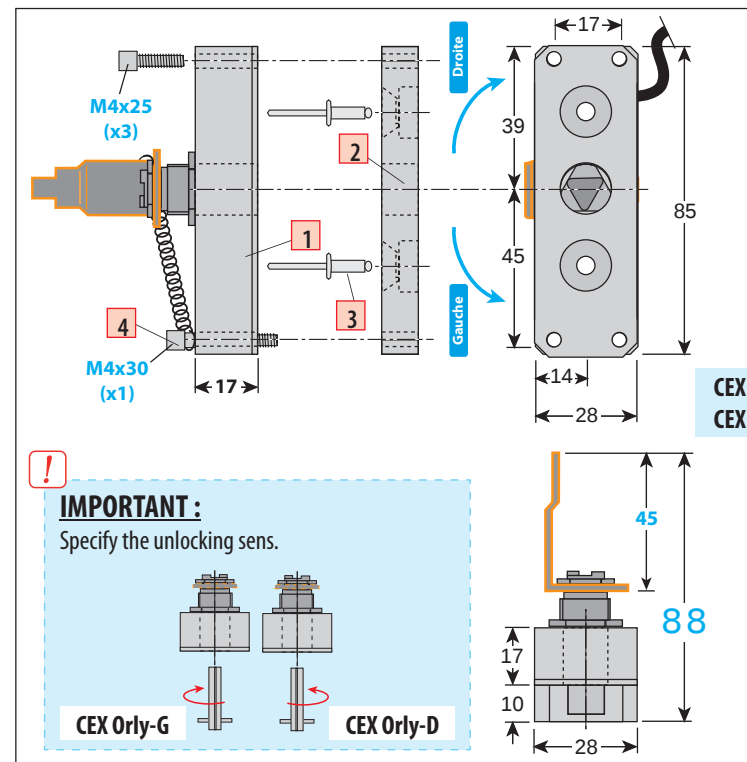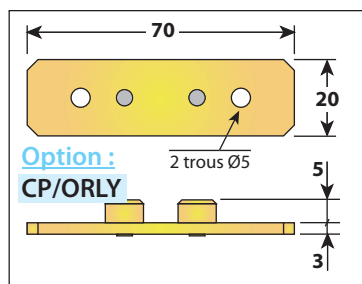

Product composition

Rep.	Qté.	Désignation
1	1	Box + Triangle + Contact + cam
2	1	Bride

Screws

Rep.	Qté.	Désignation
3	2	Rivets Ø4x16 F/steel
4	4	Screw CHC 4x25 treated

