
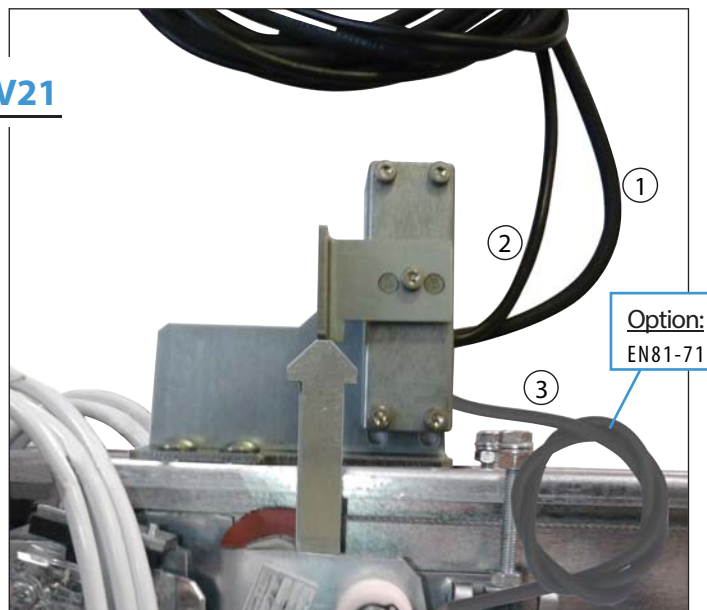
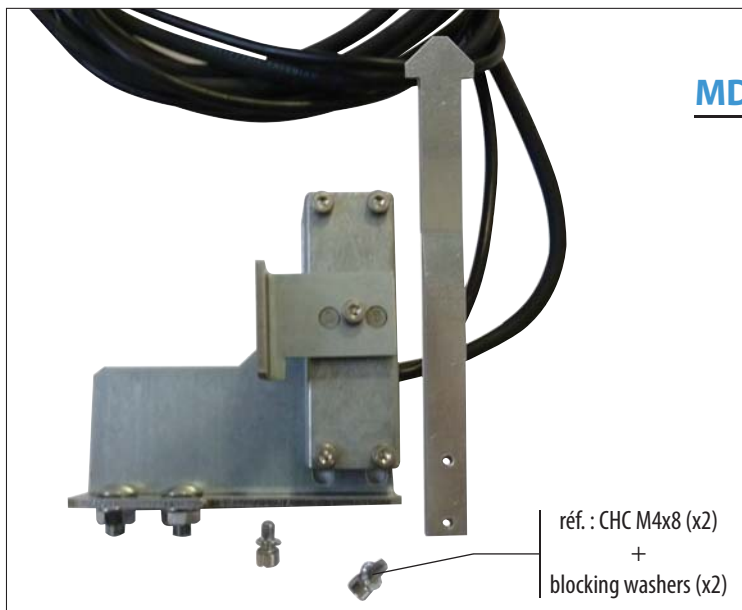
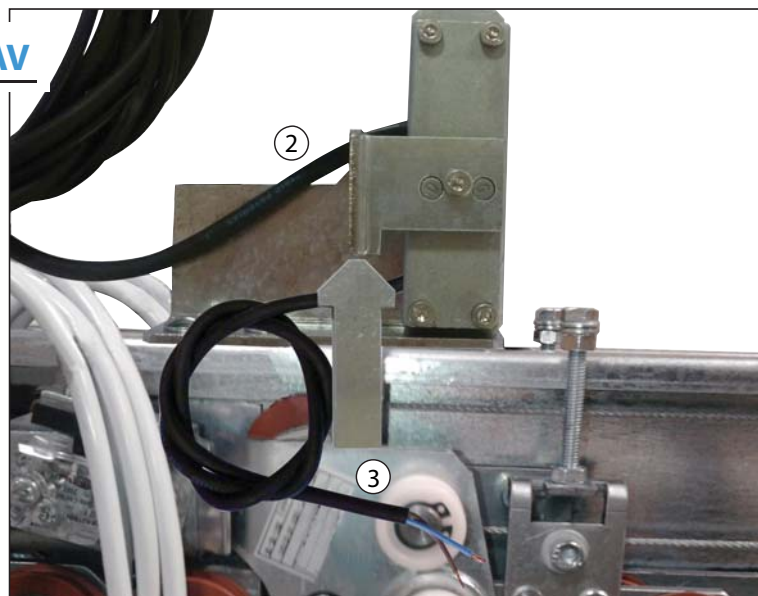


- Double door-opening detector (Wittur Fine-line 4S) Conformity with EN81.21, EN81.21 + EN81.71

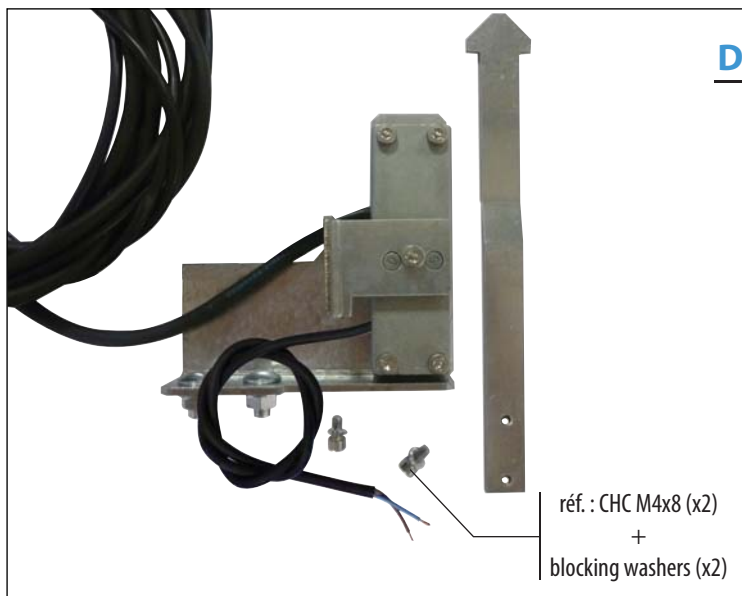

**DAV - DEX**

- **DAV700 Wittur-Fin-4S** (24 V dc - 100 mA) : Locking only, **Switched on** : device blocking.

- **DAV750 Wittur-Fin-4S** (24 V dc - 100 mA) : Locking only, **Switched off** : device blocking.

- **DAV800 Wittur-Fin-4S** (24 V dc - 100 mA) : Switched on, mechanical sticking accessible to the triangle (impossible to use the unlocking key of the lock).

- **DAV850 Wittur-Fin-4S** (24 V dc - 100 mA) : Switched off, mechanical sticking accessible to the triangle (impossible to use the unlocking key of the lock).

- **DEX Wittur-Fin-4S** (microswitch) : inverse contact for buzzer.

**WIRING (DAV) :**

- ② : 3 wires (inverse contact) :  
**black** (common), **gray** (no **blue** (NC)
- ③ : 2 wires : feeding 24 V dc

**MDV21**

**WIRING (MDV21) :**

- ① : monostable security contact
- ② : Microswitch
- ③ : Option EN81-71.

**Works with a bi-stable rearming Controller ARM/MDV21.**